

PRODUCT SPECIFICATION 产品规格书

NC2509W-B

Back Inlet Urinal
后进水小便斗



(Rough-in Dimensions):

安装尺寸图:

(Unit): mm

单位: 毫米


420x310x650(mm)

Pressure range: 0.1-0.5MPa

水压范围: 0.1-0.5MPa

Best to use: 0.3MPa

最优水压: 0.3MPa

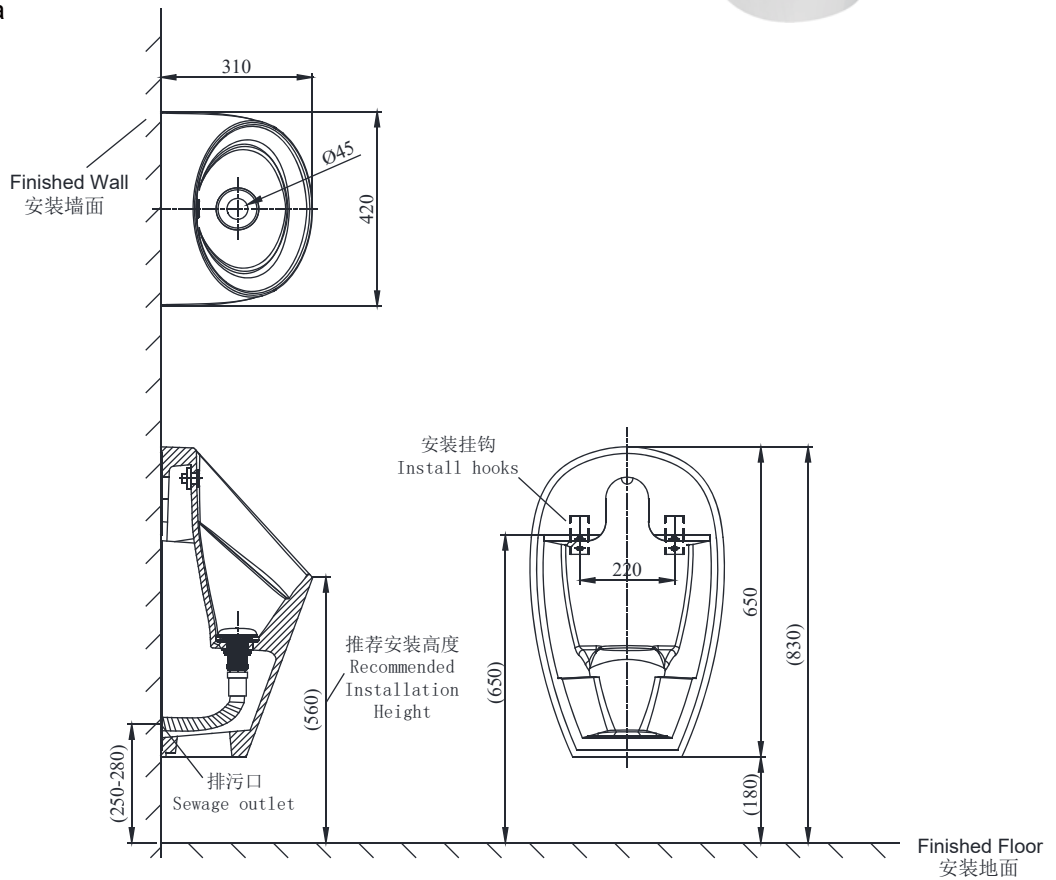

Item No. 品号	NC2509W-B		
Available Color 颜色	White 白色		
Materials 材质	Vitreous China 陶瓷		
Shipping Package 运输包装	1set/1CTN 1套/箱	L:440 X W:350 X H:680mm 长:440X宽:350X高:680mm	G.W: 25kg 毛重: 25kg
Remarks: Included Mounting Kits, ND9215C Drain, ND3901N Odor-Proof Tube, Sensor (AC100-240V/DC6V refers to 4 no.5 alkaline batteries), Average water consumption: 1.1L. 备注: 含安装螺丝、ND9215C下水器、ND3901N防臭排污管、感应器(交流100-240V/直流6V即4节5号碱性电池), 平均用水量1.1L。			

INNOCI reserves the right to make changes or modifications on any of its products without advance notice.

INNOCI 艺耐公司保留不事先通知便改变或修改的权利。

innoci[®]

Innoci Sanitary ware Co., Ltd
www.innoci.com

Version: A1
版本: A1